




# 2024年12月のレーンコンディション



Oil Pattern Distance	46	Reverse Brush Drop	38	Oil Per Board	50 ul
Forward Oil Total	9.6 mL	Reverse Oil Total	15 mL	Volume Oil Total	24.6 mL
Tank Configuration	Only A	Tank A Conditioner	ICE	Tank B Conditioner	FIRE

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	3L	3R	1	14	35	0.0	0.0	0.0	1750
2	4L	4R	1	14	33	0.0	1.9	1.9	1650
3	11L	11R	3	18	57	1.9	9.5	7.6	2850
4	13L	13R	3	22	45	9.5	18.8	9.3	2250
5	15L	15R	2	22	22	18.8	25.0	6.2	1100
6	2L	2R	0	10	0	25.0	46.0	21.0	0

	START	STOP	LOADS	SPEED	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	0	46.0	35.0	-11.0	0
2	12L	12R	4	14	68	35.0	27.1	-7.9	3400
3	10L	10R	5	14	105	27.1	17.2	-9.9	5250
4	9L	9R	3	14	69	17.2	11.3	-5.9	3450
5	6L	6R	2	14	58	11.3	7.4	-3.9	2900
6	2L	2R	0	14	0	7.4	0.0	-7.4	0

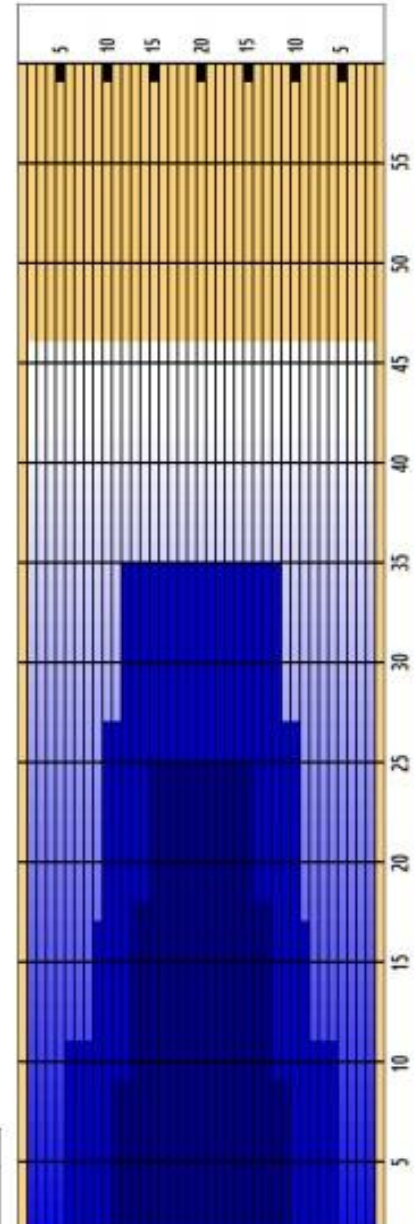

Cleaner Ratio Main Mix                    NA      Forward  
 Cleaner Ratio Back End Mix            NA      Reverse  
 Cleaner Ratio Back End Distance      NA      Combined

Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



--

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	OutsideMiddle	MiddleMiddle	InsideMiddle	Middle:Inside	MiddleMiddle	Middle:Outside
Track Zone Ratio	9.23	2.11	1.03	1.03	2.11	9.23

